



Botron B8562 is a 10 light Surface Resistivity Meter that test at 100 volts. This portable test instrument provides both RTT (resistance top to top) and RTG (resistance top to ground) will measure a wide variety of static dissipative and conductive materials. The 10 lights are color codes and are easy to read. The B8562 is accurate to +/- 10%. For quick easy testing of surface any products just push the test button and read the LED lights. For ESD Audits plug leads into 2-5lbs weights and into banana jack at the top end. The 10 light rangers from 10^3 to 10^{12} . When the low battery light, lights, change the battery. **Disclaimer:** All statements of technical information are believed to be true and are based upon tests we believe to be reliable. The proper use and application for this product must be the responsibility of the user. The statements herein shall have no force or effect.

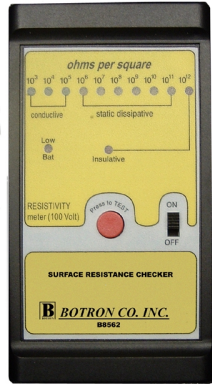

Back of B8562

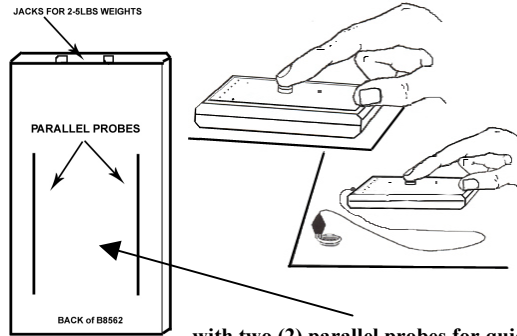

with two (2) parallel probes for quick testing

SPECIFIC	RANGES
GREEN: 10^3	$< 7 \times 10^3$
GREEN: 10^4	9×10^3 to 7×10^4
GREEN: 10^5	9×10^4 to 7×10^5
YELLOW: 10^6	9×10^5 to 7×10^6
YELLOW: 10^7	9×10^6 to 7×10^7
YELLOW: 10^8	9×10^7 to 7×10^8
YELLOW: 10^9	9×10^8 to 7×10^9
YELLOW: 10^{10}	9×10^9 to 7×10^{10}
YELLOW: 10^{11}	9×10^{10} to 7×10^{11}
RED: 10^{12+}	$> 9 \times 10^{11}$

PROPERTIES	SPECIFICATIONS
LED:	10 lights
Low battery:	LED light
Battery:	9 volts
Electrodes:	Two parallel
Ground leads:	two
Test Voltage:	100 volts
Weight:	0.60 lbs
Size:	5.5" x 2.75" x 1"
Accuracy range:	+/-10%



B8562KIT with B8562 meter, 2 leads, 2-5lbs weights and case

- . To test RTT or surface to surface, place the B8562 on the surface to be tested and push down on test button and read.
- . To test RTG or surface to ground, place the B8562 on the surface, plug one stereo plug into meter top end, with other end connect to suitable ground, and push button.
- . To Audits test with 5lbs weights, plug leads into banana jack on top end of unit and test per above.

OTHER PRODUCTS:

- B8201** Touch plate wrist strap Tester
- B8511** Combo tester, wrist & heel
- B82450** Combo testers & stand
- B82250** Dual tester & stand
- B85501** Wrist Calibration unit
- B85502** Combo Calibration unit
- B8202** Wrist tester
- B8525** Deluxe dual test station

Theory of operation. The surface resistance meter measures by setting up bridge between two precision resistors of a know value and testing of the unknown value. When the green button is depressed a test voltage of 100 volts is applied across the two conductive parallel probes on the bottom of tester or through the weights. The LED will light

RELATED TEST EQUIPMENT:

- B8562** New 10light 100volt surface meter
- B8562KIT** New 10 light 100volt audit kit with 2-5lbs weights & case
- B8560** New 10 light surface meter
- BSRM-10** 10 light surface meter
- BSRM-6** 6 light surface meter
- B8563** Analog audit kit with 5lb weights
- B8571** Analog/Digital audit kit w/weights

BOTRON CO. INC.

325 W. MELINDA LN
 PHOENIX AZ 85027
 PH# 623-582-6700 FAX# 623-582-6776

sales@botron.com / www.botron.com

NEW 10 LIGHT 100 VOLT SURFACE METER & AUDIT KIT

S8562