Botron B8775G Technical Data Sheet



Features:

StatCare Conductive Epoxy Floor Finish is designed to eliminate electrostatic charges which can damage sensitive electonic equipment or components. It will provide a durable, UL approved, slip resistant finish and can be applied on sealed concrete. It's water-based epoxy/acrylate formula is extremely resistant to chemicals and solvents. Our ESD Floor Paint is superior to and will outlast latex and urethane floor paints.

PROPERTIES SPECIFICATIONS

Color: Grey, Light Grey, Beige

Solids: $35\% \pm 1\%$

Resistivity-ASTM D257: 104-106 Ohms2 Max/Cm2 @ 40%

Relative Humidity

Weight Per Gallon: 9.1

Hardness: 30 / Sward
Viscosity: 400-600 CPS
Solvents: Water-glycol
Flash Point: >212°F

Dry Time: Dry to touch 5-7 hours

Open for traffic: 10-12


Water Resistant: 8 hours - No effect
Alcohol: 1 hour - No effect
Gasoline: 8 hours - No effect
Caustic 5%: 2 hours - No effect
Soap Resistance: 8 hours - No effect

Slip Resistance: Exceeds UL Requirements
Coverage: 450 – 600 ft² per gallon

Odor: Moderate (Glycol Ether, Alcohol)

Product Notes and Features

- Available in 3 colors
- Dry to touch in 5-7 hours
- Open for traffic in 10-12
- Long lasting
- · Water-based epoxy/acrylate
- Lead-free RoHS compliant

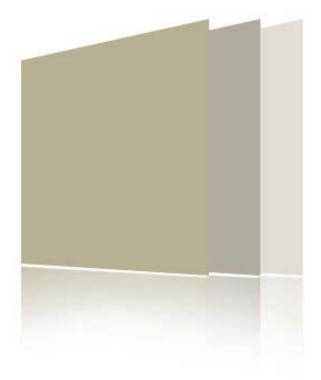

Botron Company Inc. | 21601 N. 21st Ave. Phoenix AZ 85027 | Ph# 623-582-6700 | Fax# 623-582-6776

APPLICATIONS

Coverage is 450 – 600 Sq Ft per gallon 2 coats needed for maximum effectiveness 5 to 7 hours time between coats Complete curing with maximum durability and chemical resistance will take 5-7 days.

PART NUMBERS

B8771G Gray Floor paint 1 gallon B8775G Gray Floor paint 5 gallon

B8771LG Light Gray Floor paint 1 gallon B8775LG Light Gray Floor paint 5 gallon

B8771B Beige Floor paint 1 gallon B8775B Beige Floor paint 5 gallon

GROUNDING

Using heel grounders with this StatCare floor paint gives your staff the freedom to move around the work area performing an ESD function.